



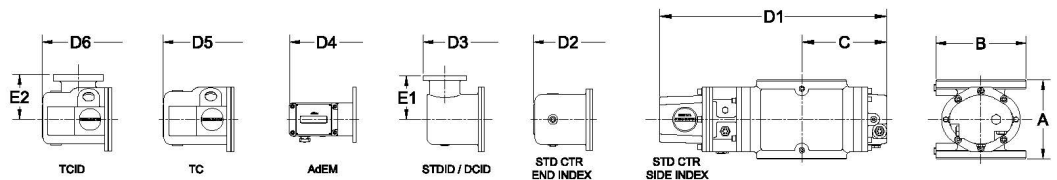

ROMET

Rotary Gas Meters

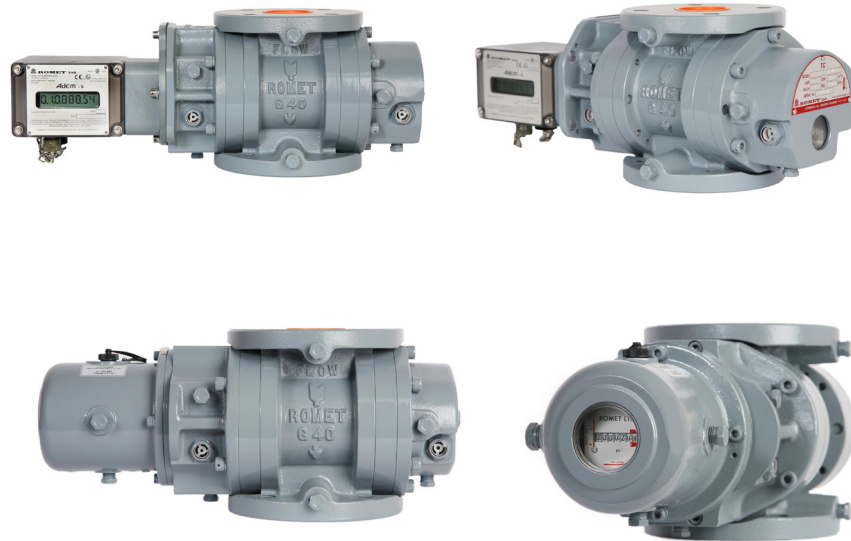

Note: AMI/AMR adaptors available upon request.

METER SIZE	DN/ PN 16 FLANGE	ANSI 125 FF FLANGE	A	B	C	D1	D2	D3	D4	D5	D6	E1	E2	WEIGHT (kg)
G40	40 or 50 mm	2"	171 mm	Ø 152 mm	121 mm	337 mm	373 mm	395 mm	373 mm	402 mm	403 mm	102 mm	102 mm	10.9-12.5

G40 - HARD METRIC

HARD METRIC G40 40 or 50 mm (2") FLANGE CONNECTION



TECHNICAL SPECIFICATION

Connection (Flange)	DN/PN16 ANSI 125FF	40 or 50 mm 2"
MAOP	(bar)	12
Flow Capacity	(m ³ /h)	65
Rangeability		1:50
Start Rate	(m ³ /h)	.071
Stop Rate	(m ³ /h)	.056
Differential @ 100% Flow	(mbar)	1.89
Instrument Drive Rate	(m ³ /rev)	.1
LF Pulser (Optional)	(m ³ /pulse)	.1

*Note: It should be noted, that moving parts in the meters with a greater rangeability ratio are made to high class accuracy and tight tolerances. Improper installation, stresses on piping system due to temperature changes, settling and gas conditions can create a risk of meter rejection.

CORRECTED FLOW CAPACITY AND TYPICAL ACCURACY GUIDE

G40 METER (SM ³ /H)	
Gauge Pressure Bar 0.012	G40 Qmax = 65 m ³ /hr
0.05	68.2
0.1	71.4
0.5	97.1
1.0	129.2
1.5	161.2
2.0	193.3
2.5	225.4
3.0	257.5
5.0	385.8
7.5	546.1
10.0	706.5
11.0	770.6
12.0	834.8

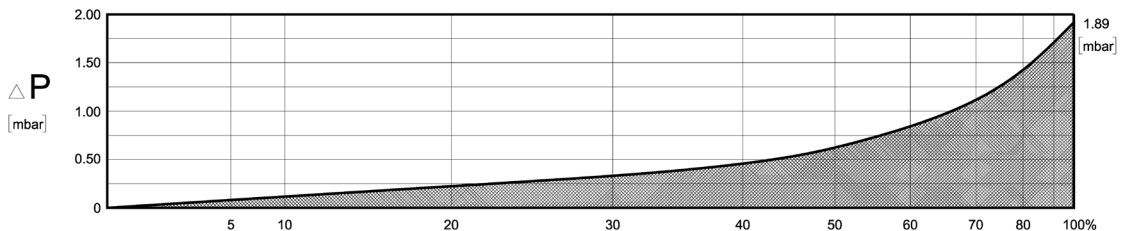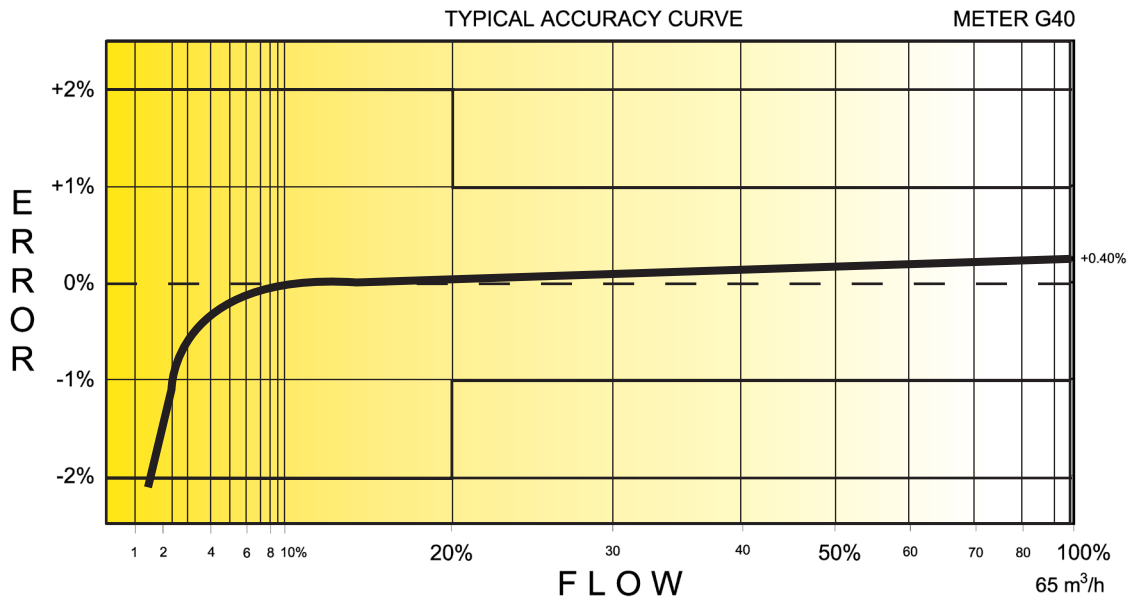

ROMET

GAS METERS AND ELECTRONIC INSTRUMENTS

Phone 905-624-1591 USA 1-800-387-3201

www.rometlimited.com • email: romet@rometlimited.com

The values quoted are typical of normal production. They do not constitute a specification. Romet Limited reserves the right to change any information in this literature without notice. All of the information and data in this literature has been carefully compiled and thoroughly checked. However, Romet Limited will not assume responsibility for any possible omissions or errors.

ROMET and ROMET & DESIGN are registered trademarks of Romet Limited. Romet Limited's gas metering technology is protected under U.S. Patent No. 4,910,519 and 6,453,721 and Canadian Patent No. 1,293,568.