


Rotary Gas Meters 3" RMT5000 - Imperial

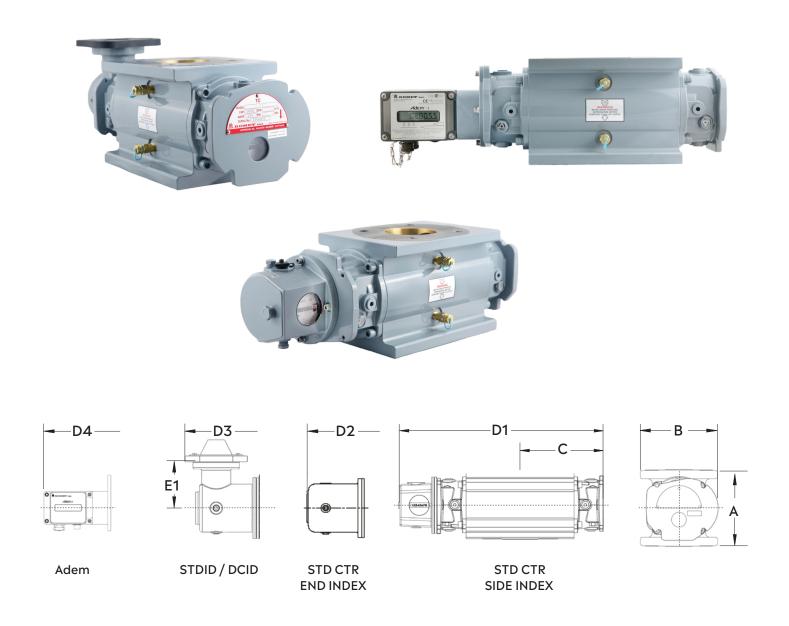

Note: AMI/AMR adaptors available upon request.

METER SIZE	ANSI 125 FF FLANGE	А	В	С	D1	D2	D3	D4	E1	WEIGHT (lbs)
RMT5000	3"	6.75"	6.88"	8.22"	19.90"	21.38"	22.84"	23.04"	4.00"	33-43

Increase capacity without rebuilding the meter set


IMPERIAL RMT5000 3" FLANGE CONNECTION TECHNICAL SPECIFICATION

Connection (Flange)	ANSI 125 FF	3"	
MAOP	(psig)	175	
Flow Capacity	(cfh)	5000	
Rangeability * @ ±2% / ±1% Error		1:220/1:150	
Start Rate	(cfh)	.42	
Stop Rate	(cfh)	0.34	
Differential @ 100 % Flow [AIR/N.G.]	(I.W.C.)	0.95/ 0.57	
Instrument Drive Rate	(cf/rev)	10 or 100	
LF Pulser (Optional)	(cf/rev)	10 or 100	

^{*}Note: It should be noted, that moving parts in the meters with a greater rangeability ratio are made to high class accuracy and tight tolerances. Improper installation, stresses on piping system due to temperature changes, settling and gas conditions can create a risk of meter rejection.

CORRECTED FLOW CAPACITY AND TYPICAL ACCURACY GUIDE

RMT5000 METER (SCFH)				
Gauge Pressure P.S.I.G 0.25	RMT5000 Qmax = 5000ft ³ /hr			
2	5227			
5	6585			
10	8282			
15	9980			
20	11677			
25	13374			
50	21860			
75	30346			
100	38832			
125	47318			
150	55804			
175	64291			

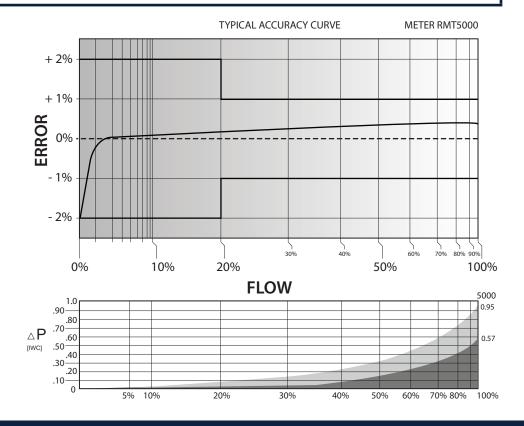



The values quoted are typical of normal production. They do not constitute a specification. Romet Limited reserves the right to change any information in this literature without notice. All of the information and data in this literature has been carefully compiled and thoroughly checked. However, Romet Limited will not assume responsibility for any possible omissions or errors.